

Max Flo XL

Dernière née de la gamme, la Max Flo XL dispose de toute l'expérience, et du savoir faire Hayward®. Comme ses aînées de la série Max Flo, elle est particulièrement indiquée pour les petites configurations, bassins de taille moyenne ou bassins hors-sol.

Les PLUS

- + Pompe pour bassins de petite taille ou de taille moyenne ou pour bassins hors sol
- + S'adapte aussi bien aux nouvelles installations que pour le marché de la rénovation
- + L'ouverture du pré-filtre se fait très facilement par couvercle quart de tour

Raccords unions facilitant l'installation



Couvercle de préfiltre transparent



Bouchons de vidange facilitant l'hivernage



2 ANS GARANTIE + 1 AN + 1 AN

(1)



POLYVALENCE

- S'adapte aussi bien aux nouvelles installations que pour le marché de la rénovation.
- Sortie en 50 mm à coller / 2" à visser.
- Puissance de 0,5 à 1,5 cv.
- Existe en monophasée et triphasée.

PERFORMANCE



- Moteur résistant et à rendement élevé.
- Amélioration du temps d'amorçage jusqu'à 2m40 au dessus du niveau d'eau.
- Turbine haute performance en Noryl® avec insert en laiton.

RÉSISTANCE

- Résistance à la corrosion chimique et saline en utilisation normale.
- Obturateur en céramique sur carbone.

ENTRETIEN FACILE

- Facilité d'ouverture du couvercle de préfiltre (en 1/4 de tour). Couvercle transparent permettant de voir quand changer le panier de préfiltre.
- Entretien et maintenance facile : seulement 4 vis à enlever.

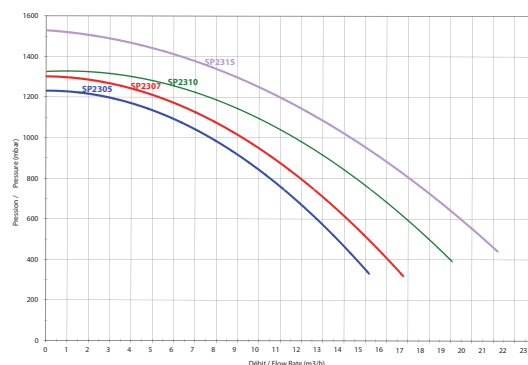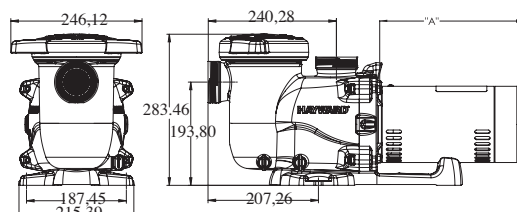

	Puissance	Débit*	Côte A	E/S	Poids	Puissance Absorbée P1	Puissance Restituée P2	Référence P/N
MAX FLO XL MONOPHASÉE	0,5 cv	10,5 m³/h	231,5 mm	50 mm	12,9 kg	640 W	430 W	SP2305XE81
	0,75 cv	12 m³/h	231,5 mm	50 mm	12,9 kg	640 W	430 W	SP2307XE111
	1 cv	13,5 m³/h	231,5 mm	50 mm	13,9 kg	975 W	720 W	SP2310XE161
	1,5 cv	15,5 m³/h	231,5 mm	50 mm	14,07 kg	1 100 W	790 W	SP2315XE221
MAX FLO XL TRIPHASÉE	0,75 cv	11,5 m³/h	201,05 mm	50 mm	11,4 kg	640 W	430 W	SP2307XE113
	1 cv	14,5 m³/h	201,05 mm	50 mm	12,02 kg	975 W	690 W	SP2310XE163
	1,5 cv	17 m³/h	231,05 mm	50 mm	13,2 kg	945 W	750 W	SP2315XE223

*à 8 m de colonne d'eau

(1) 2 ans de garantie + 1 an de garantie offert si le produit est acheté chez un partenaire Totally Hayward® + 1 an de garantie offert si le produit est enregistré sur www.hayward.fr « espace SERVICES »



POMPES



FILTRES



PROJECTEURS



TRAITEMENT EAU



NETTOYEURS



POMPES À CHALEUR





HAYWARD®

The secret for a successful pool

www.hayward.fr/en

CONTINUE THE EXPERIENCE ON:

facebook.com/hayward.fr

[YouTube HaywardPoolEurope](https://www.youtube.com/HaywardPoolEurope)

ONLINE SERVICES

Free extended warranty
Free subscription to the newsletter
The heat pump configurator
Online savings simulator
On-line expert
Spare parts catalogue

PUMPS

Max Flo XL

The latest addition to the range, the Max Flo XL uses all the Hayward® experience and know-how. Like its older siblings in the Max Flo series, it is particularly recommended for the small configurations, medium size pools or above ground pools.

The ADVANTAGES

- + A pump for small or medium size pools or above ground pools
- + Suitable for new constructions and for a replacement
- + The filter basket is easily accessed through a quarter-turn cover

Service-ease design provides easy installation



See through strainer cover



Drain plugs for an easy winterizing



2 YEARS WARRANTY + **1 YEAR** + **1 YEAR** (1)



POLYVALENCE

- Suitable for new constructions and for a replacement.
- 50 mm to glue or 2" to screw.
- Models of 0,5 to 1,5 cv.
- One phase and three phase.

EFFICIENCY



- Heavy-duty, high-performance motor.
- Self-priming suction lift up to 8' above water level.
- Maximum performance Noryl® impeller.

EXTRA DURABILITY

- Resists chemical and saline corrosion in normal use.
- Ceramic end seal with carbon.

EASE OF USE

- Strainer cover seals with less than a 1/4 turn. Clear cover to know when the basket needs cleaning.
- Easy to service with just 4 bolts to remove.

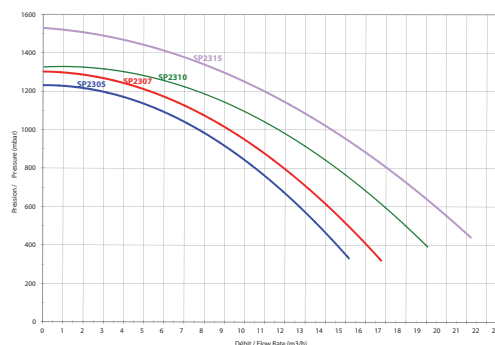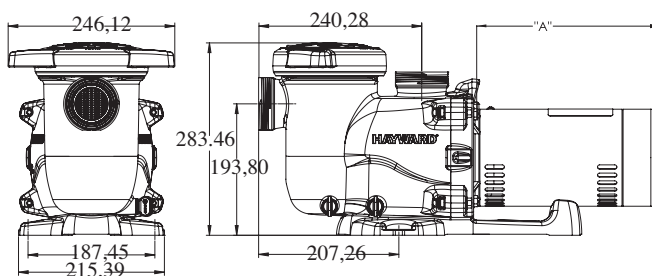

SINGLE PHASE
MAX FLO XL

THREE PHASE
MAX FLO XL

POWER	Flow Rate*	Side A	E/S	Weight	Input Power P1.	Output Power P2.	P/N
0,5 cv	10,5 m³/h	231,5 mm	50 mm	12,9 kg	640 W	430 W	SP2305XE81
0,75 cv	12 m³/h	231,5 mm	50 mm	12,9 kg	640 W	430 W	SP2307XE111
1 cv	13,5 m³/h	231,5 mm	50 mm	13,9 kg	975 W	720 W	SP2310XE161
1,5 cv	15,5 m³/h	231,5 mm	50 mm	14,07 kg	1 100 W	790 W	SP2315XE221
0,75 cv	11,5 m³/h	201,05 mm	50 mm	11,4 kg	640 W	430 W	SP2307XE113
1 cv	14,5 m³/h	201,05 mm	50 mm	12,02 kg	975 W	690 W	SP2310XE163
1,5 cv	17 m³/h	231,05 mm	50 mm	13,2 kg	945W	750 W	SP2315XE223

*To 8 meter water height

(1) 2 years warranty + 1 year extra when the product is purchased from a Totally Hayward dealer + 1 year extra when it is registered on www.hayward-pool.co.uk, « space SERVICES »



PUMPS



FILTERS



LIGHTING



WATER TREATMENT



CLEANERS



HEAT PUMPS

